

# POWER RELAY

## 1 POLE—15 to 25 A (FOR AUTOMOTIVE APPLICATIONS)

### FBR161,166 SERIES

#### ■ FEATURES

- Suitable for automotive applications such as motor load controls, door locks, power windows, wipers, etc.
- Variety of contact materials covering wide current switching in range of 15 A to 25 A (at 14 VDC)
- FBR166 series with high conductive spring and improved break performance is also available

#### ■ ORDERING INFORMATION

##### ● FBR161 Series

[Example]  $\frac{\text{FBR161}}{\text{(a)}} \frac{\text{S}}{\text{(b)}} \frac{\text{E}}{\text{(c)}} \frac{\text{D012}}{\text{(d)}} - \frac{\text{W}}{\text{(e)}} \frac{\text{**}}{\text{(f)}} \frac{\text{**}}{\text{(g)}}$



(a)	Series Name	FBR161: 1 form C FBR161 Series
(b)	Enclosure	S : Flux free type N : Plastic sealed type
(c)	Coil Type	E : Nominal power 0.36 to 0.38 W C : Nominal power 0.45 to 0.5 W
(d)	Nominal Voltage	D012 : 12 VDC (example)
(e)	Contact Material	C : Silver copper (15 A maximum) W : Silver-tin oxide indium (20 A maximum) WB : Silver-tin oxide indium (25 A maximum)
(f)	Custom Designation	Custom specification to be assigned
(g)	Package Style	Nil : Standard tray -S : Tube carrier

##### ● FBR166 Series

[Example]  $\frac{\text{FBR166}}{\text{(a)}} \frac{\text{S}}{\text{(b)}} \frac{\text{CD009}}{\text{(c)}} - \frac{\text{WB}}{\text{(d)}} \frac{\text{**}}{\text{(e)}} - \frac{\text{**}}{\text{(f)}}$

(a)	Series Name	FBR166: 1 form C FBR166 Series
(b)	Enclosure	S : Flux free type N : Plastic sealed type
(c)	Nominal Voltage	CD009 : 9 VDC (example)
(d)	Contact Material	WB : Silver-tin oxide indium (25 A maximum)
(e)	Custom Designation	Custom specification to be assigned
(f)	Package Style	Nil : Standard tray -S : Tube carrier

# FBR161,166 SERIES

## ■ SPECIFICATIONS

Item		Specifications	
Contact	Arrangement	1 Form C (SPDT)	
	Material	C : Silver copper (15 A maximum) W : Silver-tin oxide indium (20 A maximum) WB : Silver-tin oxide indium (25 A maximum)	
	Voltage Drop (resistance)	Maximum 100 mV (at 1 A 6 VDC)	
	Maximum Carrying Current	Contact C and W type: 17 A/1 hour, 5 A (continuously) Contact WB type : 25 A/1 hour, 10 A (continuously) (25°C, 100% rated coil voltage)	
	Maximum Switching Current	15 A 16 VDC (silver copper: C type) 20 A 16 VDC (silver-tin oxide indium : W type) 25 A 16 VDC (silver-tin oxide indium: WB type)	
Coil	Operating Temperature	-40°C to + 85°C (no frost) (refer to the CHARACTERISTIC DATA)	
	Storage Temperature	-40°C to + 100°C (no frost)	
Time Value	Operate (at nominal voltage)	Maximum 10 ms	
	Release (at nominal voltage)	Maximum 5 ms	
Life	Mechanical	1 × 10 <sup>7</sup> operations minimum	
	Electrical	FBR160 Series: 1 × 10 <sup>5</sup> operations minimum FBR166 Series: 2 × 10 <sup>5</sup> operations minimum (14 VDC, maximum switching current, resistive load) (refer to the CHARACTERISTIC DATA)	
Other	Vibration Resistance	10 to 55 Hz (double amplitude of 1.5 mm)	
	Shock Resistance	Misoperation	100 m/s <sup>2</sup> (11 ±1 ms)
		Endurance	1,000 m/s <sup>2</sup> (11 ±1 ms)
	Weight	Approximately 11 g	

## ■ COIL RATINGS

MODEL		Nominal voltage	Coil resistance voltage ±10%	Must operate voltage (+20°C)	Must operate voltage (+80°C)	Operating voltage (reference)	Nominal power	Contact material	Thermal resistance
FBR161 Series	FBR161S (N) ED009-W32	9 VDC*	210Ω	6.0 V	7.4 V	6.0 V to 14.0 V	Approx. 380 mW	Silver tin indium oxide	84°C/W
	FBR161S (N) ED009-W12	9 VDC*	225Ω	6.5 V	8.0 V	6.5 V to 14.0 V	Approx. 360 mW	Silver tin indium oxide	83°C/W
	FBR161S (N) ED009-WB38	9 VDC*	225Ω	6.3 V	8.0 V	6.5 V to 16.0 V	Approx. 360 mW	Silver tin indium oxide	
	FBR161S (N) CD012-C36	12 VDC	320Ω	7.3 V	9.0 V	7.3 V to 15.5 V	Approx. 450 mW	Silver copper	78°C/W
	FBR161S (N) CD012-W36	12 VDC	320Ω	7.3 V	9.0 V	7.3 V to 15.0 V	Approx. 450 mW	Silver tin indium oxide	
	FBR161S (N) CD012-W31	12 VDC	290Ω	7.3 V	9.0 V	7.3 V to 15.5 V	Approx. 500 mW	Silver tin indium oxide	76°C/W
FBR166 Series	FBR166S (N) CD009-WB	9 VDC*	120Ω	6.3 V	7.8 V	6.3 V to 14.0 V	Approx. 670 mW	Silver tin indium oxide	67°C/W
	FBR166S (N) CD012-WB	12 VDC	210Ω	7.3 V	9.0 V	7.3 V to 14.0 V	Approx. 680 mW	Silver tin indium oxide	

\* For typical 12 VDC automotive applications.

# FBR161,166 SERIES


## CHARACTERISTIC DATA

### 1. SERVICE LIFE WITH ACTUAL MOTOR LOAD TEST (example)


- Wiper motor (free, 16 VDC inrush 20 A, break 2 A) : more than  $3 \times 10^5$  operations (FBR160-W, silver tin oxide alloy)
- Wiper motor (free, 14 VDC inrush 25 A, break 5 A) : more than  $5 \times 10^5$  operations (FBR160-WB, silver tin oxide alloy)
- Door lock motor (stall, 14 VDC inrush -25 A) : more than  $1 \times 10^5$  operations (FBR160-W, silver tin oxide alloy)
- Door lock motor (stall, 14 VDC inrush -25 A) : more than  $2 \times 10^5$  operations (FBR166)

### 2. OPERATING COIL VOLTAGE (example)


[FBR161S(N)ED009-W32,  
approximately 380 mW type]

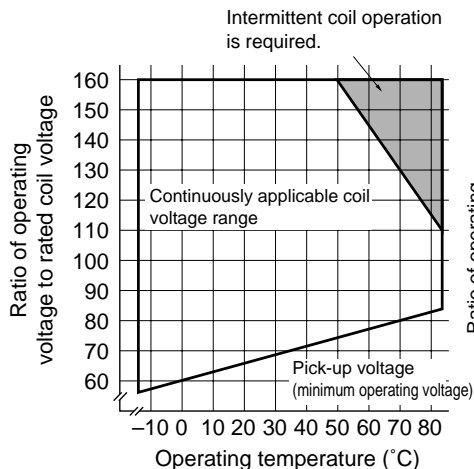

[FBR161SCD012-W36,  
Approximately 450 mW type]

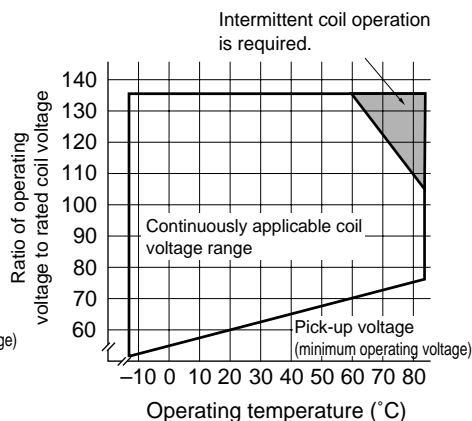


[FBR166S (N) CD012-WB,  
approximately 680 mW type]

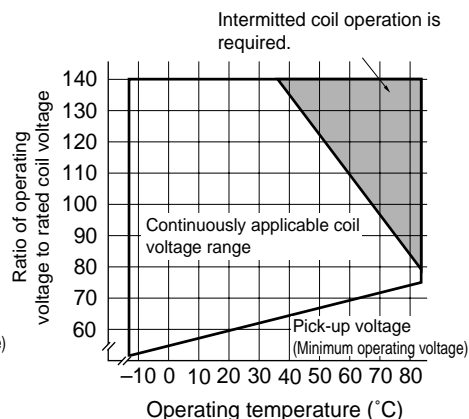


## REFERENCE DATA


Distribution of operate and release voltage

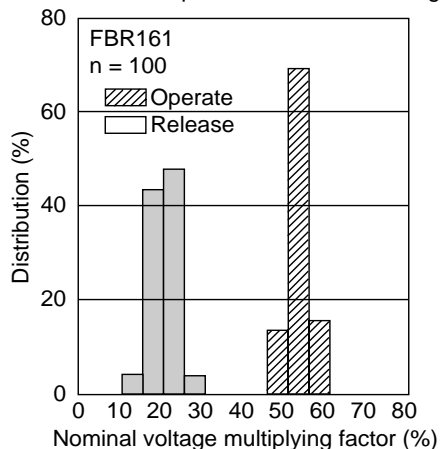

Distribution of operate and release time

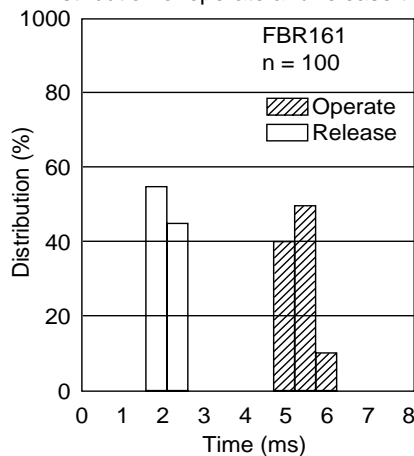


Distribution of contact resistance

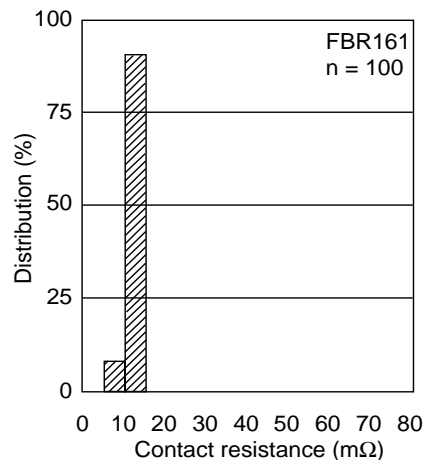


# FBR161,166 SERIES

## ■ DIMENSIONS


### ● Dimensions

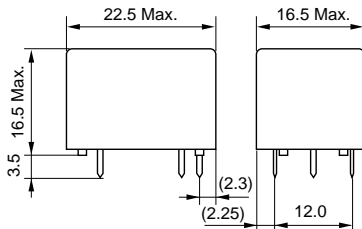


### ● Schematic (BOTTOM VIEW)



### ● PC board mounting hole layout (BOTTOM VIEW)



### ● Tube carrier

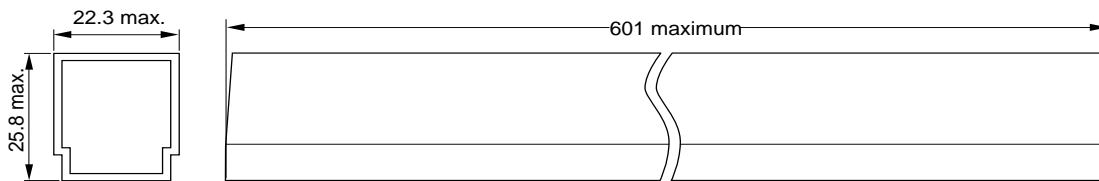

25 pieces/tube

## Fujitsu Takamisawa International Headquarter Offices

[www.fujitsu.takamisawa.com](http://www.fujitsu.takamisawa.com)

### Japan

Fujitsu Takamisawa Component Limited  
Global Marketing and Sales  
Gotanda-Chuo Building  
3-5, Higashigotanda 2-chome, Shinagawa-ku  
Tokyo 141, Japan  
Tel: (81-3) 5449-7010  
Fax: (81-3) 5449-2626

### North and South America

Fujitsu Takamisawa America, Inc.  
250 E. Caribbean Drive  
Sunnyvale, CA 94089 U.S.A.  
Tel: (1-408) 745-4900  
Fax: (1-408) 745-4970

### Europe

Fujitsu Takamisawa Europe B.V.  
Diamantlaan 25  
2132 WV Hoofddorp  
Netherlands  
Tel: (31-23) 5560910  
Fax: (31-23) 5560950

### Asia Pacific

Fujitsu Takamisawa Asia Pacific Pte. Ltd.  
102E Pasir Panjang Road  
#04-01 Citilink Warehouse Complex  
Singapore 118529  
Tel: (65) 375-8560  
Fax: (65) 273-3021